

1. Check All Hardware

Be sure you have all components identified in Diagram A.

Tools you will need

- Phillips screwdriver or 1/4" hex driver
- Hand or electric drill with 1/16" drill bit
- Pencil
- Tape measure


When using tools, make sure you have proper eye protection. Never use tools while under the influence of alcohol or other drugs.

Choose the Proper Fastener

For installation in wood or aluminum window frames, Levolor recommends using the sheet metal screws included with your Levolor blind. For other types of wall construction, you will need to furnish different fasteners.

Fastener options (Diagram B, from left):

- #8 screws for wood or aluminum
- Plastic inserts for drywall or plaster
- Auger threaded zinc or plastic inserts for drywall
- Molley bolts for plaster
- Toggle bolts for lath & plaster



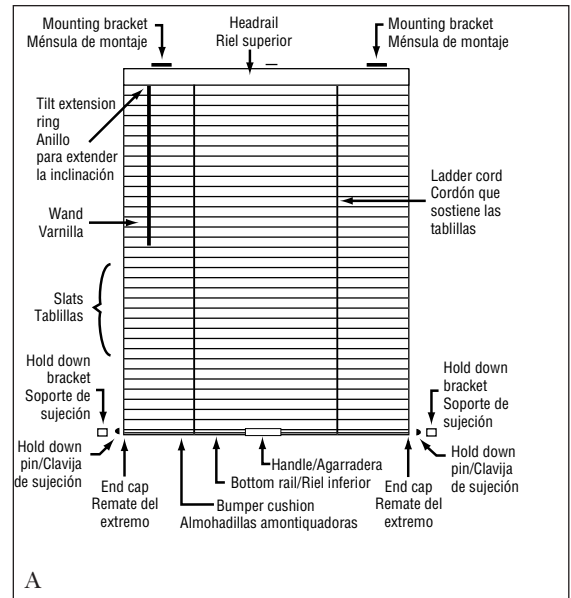


2. Attach the Brackets

Installing end brackets: Determine where to attach each bracket. There is a left bracket (Diagram C), and a right bracket (Diagram D). For outside mounting (Diagram E), position bracket on the window frame or wall and attach with proper fasteners. For inside mounting (Diagram F), position top of bracket against inside surface of window frame and attach as shown. Each end bracket uses two screws mounted diagonally. Make sure end brackets are level.

Installing support brackets (where supplied): Center the support bracket between the two end brackets. Keep the top and back of each support bracket level and aligned with tops and backs of end brackets. If more than one support bracket is used, space the support brackets evenly across the width of the headrail (Diagram G).

Insert screws in the top for an inside mount; insert screws in the back for an outside mount (Diagram H (1/2") and Diagram I (1").

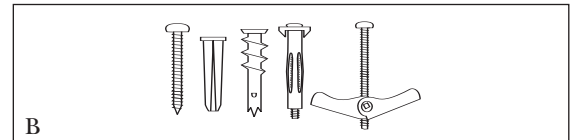

Step 3. Attach the valance clips

Slip the valance clips over the the front of the headrail (diagram J). Be sure the valance clips are spaced evenly along the length of the headrail.




Step 4. Install the headrail

NOTE: When using support brackets, you must first engage the headrail onto those support brackets before inserting into end brackets.

For 1/2" slat blinds, slide the back of the headrail under notch inside the bracket and then let the headrail rest on the bottom.

For 1" slat blinds, slide the headrail most of the way into the end brackets. Lift headrail into position with front lip between the locking mechanism and bracket hook (Diagram K). Slide headrail back toward window so front lip engages bracket hook, while inserting the headrail into the end brackets (Diagram L). Push locking mechanism back until it snaps into place (Diagram M).

Then close end bracket covers until they click into place (Diagram N).

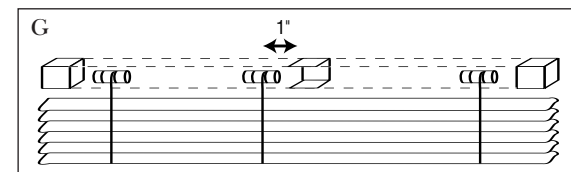



Step 5. Adjust headrail fit















The headrail should fit end brackets tightly. To adjust, bend out the tab on each end of the headrail (Diagram O) until a snug fit is achieved. After adjusting the fit, replace headrail as described above in Step 3. To remove the headrail, rotate the bracket cover up (Diagram P). (You may have to use the tip of a screwdriver to push the cover open.)

Step 6. Attach the tilt wand

Push the tilt wand sleeve up (Diagram Q), engage the S-hook as shown, then pull sleeve down (Diagram R). Rotate the tilt wand to open and close blind slats. Use the pull cord to raise and lower blind.



1/2", 1", 1 3/8" Metal Blinds

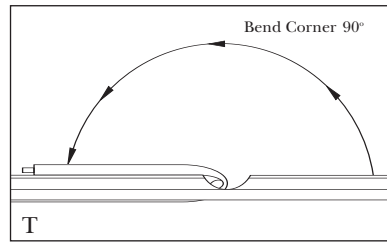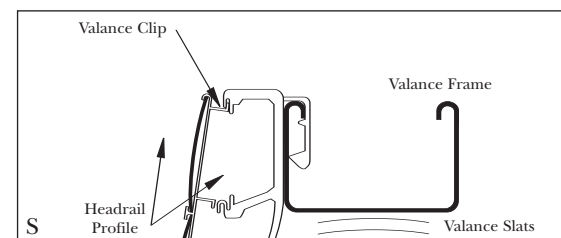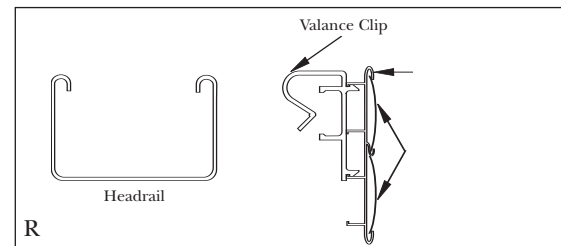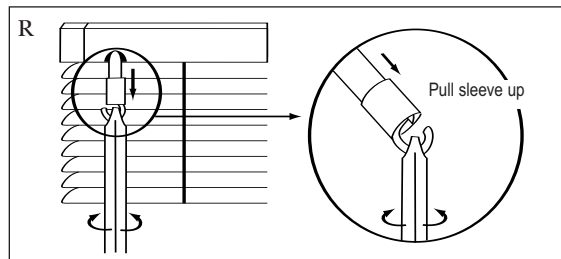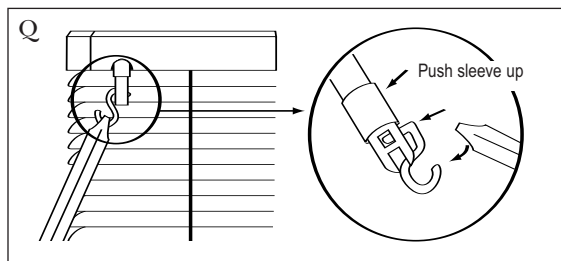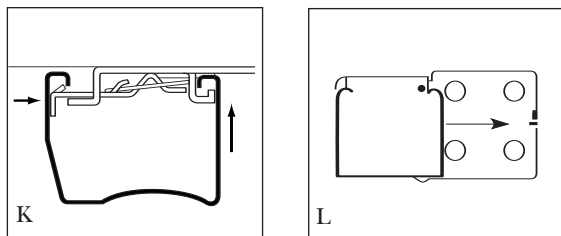

Step 6. Install Vogue® Valance - Inside mounting

Your Riviera blind includes either a double or single slat valance. The valance clip attaches to frame as shown (Diagram R). Valance clip is then attached to headrail (Diagram S). Be sure the valance clips are spaced evenly along the length of the valance frame. On tight inside mount applications it may be necessary to attach the valance clips prior to installing the headrail in the mounting brackets (Diagram S).

Step 6. Install Vogue® Valance - Outside mounting

Riviera blinds ordered as an outside mount are supplied with a valance, 2 corners and 2 return pieces fully assembled. The valance is shipped flat. To form the corner, hold frame and return firmly and bend down over table edge to form a 90° angle. Corner will lock into position (Diagram T). Continue as described under Inside Mounting. Valance returns are designed to cover the size of the installation bracket. Returns may be trimmed with a scissors, if necessary, to shorten (Diagram U).

Step 7. Install Hold Down Brackets (Optional)

For an inside mount, attach bracket to bottom surface using rear most hole, and attach to side surface using center hole (Diagram W).

For an outside mount, attach bracket to wall or window frame using rear most hole only (Diagram X).

Cleaning Instructions

- Keep your Riviera blind looking its best by periodically wiping it with a soft cloth, a dusting mitt, or the round brush attachment from a vacuum cleaner.
- You can clean the blind hanging in place or you can take it down.
 - By tilting the slats down, but not quite closed, you'll be able to clean most of the top surface of each slat.
- In very dusty environments, you may need to use a sponge or dampened soft cloth to clean the blind.
- Use warm (not hot) water and a mild detergent. The mild detergent cannot contain abrasives.
 - Rinse the blind with clean water to prevent water spots.
 - Place a towel on the floor or window sill to absorb any water that might drip from the blind.

Please note that certain solutions and equipment are too harsh and can cause shrinkage and/or color damage to your blind. The Levolor Forever Never Worry Warranty does not cover damage caused by cleaning methods that use abrasive solutions.